

# OCDRIVESHAFT.COM

## SAMPLE FORM

ENTER SPECS FOR CUSTOM SHAFT  
DOUBLE-CHECK SPECS BEFORE PURCHASE  
PURCHASE IS ALLOWED AFTER COMPLETING FORM

### Driveshaft Build Form: 1310 Series, 3" Aluminum, Transmission Slip Yoke to Pinion Yoke

Fill out form to build your ALUMINUM driveshaft

Contact information:

 First Name  Last Name

Email

Phone

 - 

Area Code Phone Number

Contact information is used for automated confirmation email.

Next

### Driveshaft Build Form: 1310 Series, 3" Aluminum, Transmission Slip Yoke to Pinion Yoke

#### Required measurements and information

This form will help you gather the measurements necessary to build a driveshaft for your application.


##### IMPORTANT NOTES:

Always measure driveshaft length with vehicle suspension at ride height.

We measure everything in inches.

When measuring anything under 6 inches, use a 6-inch scale or calipers, avoid using a tape measure.

##### Measurement Guide:

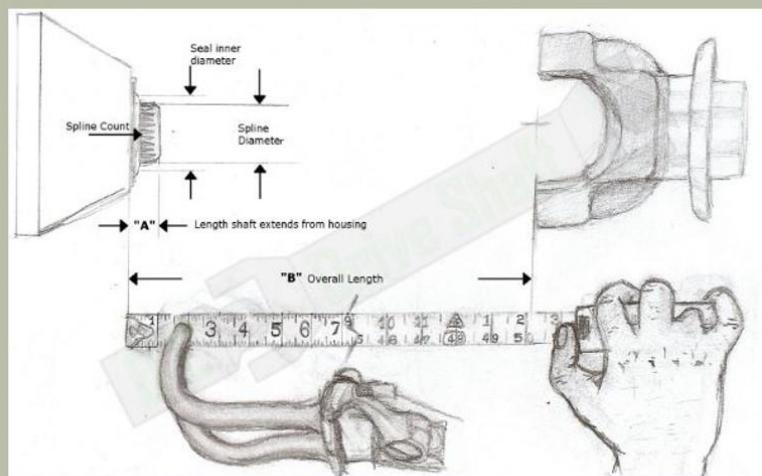

NOTE: Maximum Overall Length for 3" Shaft is 55.0". WHY? Click [HERE](#) to find out.

##### Enter dimensions in fields:

Dimensions are measured in inches and can be entered as decimals (eg. 0.75 or 20.125)

A: Length shaft extends from housing

 Enter a number between 0.000 and 10.000

Valid range (0.000" to 10.000")

B: Overall Length

 Enter a length between 8.000 and 55.000

Valid range for 3" shafts (8.000" to 55.000") Need a longer shaft? Go back and choose form for 3.5" or 4" tube.

Shaft dimensions are entered in these fields.


Go Back

Next

## Driveshaft Build Form: 1310 Series, 3" Aluminum, Transmission Slip Yoke to Pinion Yoke

### Select Slip Yoke

Make selection from list below

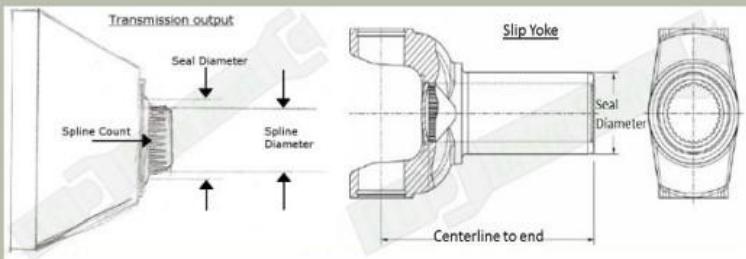

**Note:** GM TH400 with threaded hole in output shaft is 'Fixed Yoke' transmission and requires a .550" counterbored slip yoke, only available in Sonnax 1350 Chromoly Slip Yoke.

#### Slip Yoke choices are displayed in 3 categories:

**Domestic applications:** Slip yokes from Spicer, Neapco and PTI are included in the driveshaft price. (Includes Ford, GM, Dodge)

**Foreign applications (add \$40):** Slip yokes from Spicer, Neapco and PTI for foreign applications (Includes Toyota, Nissan, Mitsubishi, ...)

**Sonnax Performance (add \$80):** Forged steel slip yokes are available for popular muscle cars.

- Domestic applications
- Foreign applications (Add \$40)
- Sonnax Performance (Add \$80)

	Spline count	Spline Diameter	Centerline to end	Seal Diameter	Possible applications
<input type="radio"/>	XX	X.XXX	X.XXX	X.XXX	Grampa's roadmaster

Domestic applications	26 1.158 6.000 1.358 Chrysler A-504,A833 26 spline
	27 1.760 5.750 1.500 1987up Jeep Wrangler, boot, hub not ground
	27 1.760 5.750 1.502 High angle version used on Jeep Wranglers
	28 1.220 6.500 1.500 Ford C4
	28 1.220 6.000 1.500 Ford C4 (short)
	28 1.220 7.750 1.500 Early Mustangs, Recessed spline non-vented
	28 1.220 8.187 1.600 Explorer/Sport-Trac, Full spline non-vented
	25 1.113 6.500 1.375 Ford C3 A4LD, Ranger, BroncoII, Aerostar
	16 1.172 4.875 1.500 Powerglide early Chevrolet passenger cars.
	27 1.176 4.891 1.500 Corvette w/o vibration damper (Counterbore .500")
	27 1.176 4.975 1.500 GM TH350
	27 1.176 5.489 1.500 GM TH350, GM cars and truck until the mid 80's.
	27 1.176 6.420 1.502 GM TH700, 4L60E
	32 1.397 5.500 1.885 GM TH400, 4L80E, T10 32 spline (short)
	32 1.397 8.060 1.875 High angle, full spline, early GM 4x4 trucks 208/241 tcase.
Foreign applications	24 1.005 6.047 1.375 Subaru, Nissan
	21 1.104 6.000 1.496 Toyauto
	23 1.200 5.750 1.578 Toyauto
	30 1.284 6.266 1.652 Nissan (Counterbore .390")
	30 1.284 7.270 1.652 Nissan (Counterbore .450")
	30 1.284 7.420 1.652 Nissan Pathfinder (Counterbore .630")
	26 1.115 6.047 1.494 Nissan (Counterbore .390")
	24 1.082 6.000 1.578 Mitsubishi
	21 1.100 6.000 1.496 Toyauto High angle
	32 1.377 6.102 1.731 Nissan/Infiniti, Counter bore depth .393
Sonnax Performance	28 1.220 6.500 1.500 Ford C4
	28 1.220 6.000 1.500 Ford C4
	27 1.176 4.875 1.500 GM TH350
	27 1.176 5.489 1.500 GM TH350, GM cars and truck until the mid 80's.
	32 1.397 5.500 1.885 GM TH400, 4L80E, T10 32 spline (short)
	32 1.397 4.880 1.885 GM TH400 (short-short)

Go Back

Choose  
correct slip  
yoke for your  
application

Next

## Driveshaft Build Form: 1310 Series, 3" Aluminum, Transmission Slip Yoke to Pinion Yoke

### Determine pinion yoke style and u joint series


Make selection for pinion yoke style and u joint series below

Select pinion yoke style

- With locating tabs (outside lockup)
- Without locating tabs (inside lockup)

## Select pinion yoke style and u-joint series


### Outside lockup style yoke

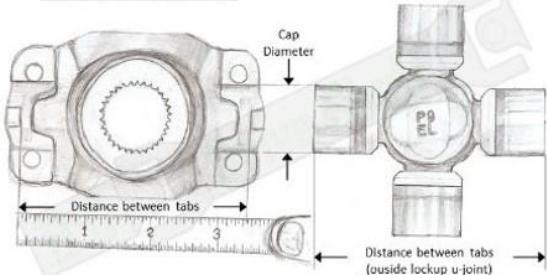

### Outside Locating Tabs

Series	Cap Diameter Decimal	Cap Diameter Fractional	Dimension Between Tabs	Notes
1310	1.063"	1-1/16"	3.219"	Spicer Solid Body
1310 Ford	1.125"	1-1/8"	3.219"	Spicer Solid Body
1330	1.063"	1-1/16"	3.625"	Neapco Solid Body

### Inside lockup style yoke

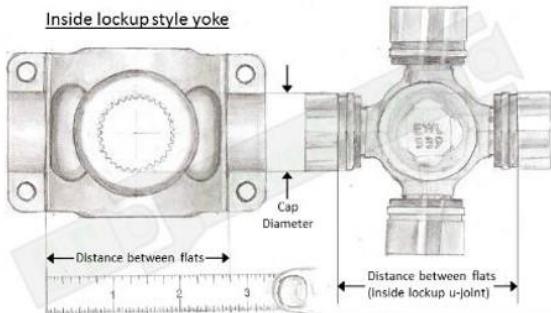

### Inside Locating Tabs

Series	Cap Diameter Decimal	Cap Diameter Fractional	Dimension Between Tabs	Notes
7260	1.078"	1-5/64"	2.125"	Spicer Solid Body
3R	1.125"	1-1/8"	2.556"	Neapco Solid Body
7290	1.126"	1-1/8"	2.622"	Greasable
Toyota	1.142"	1-9/64"	2.047"	Greasable
Nissan	1.102"	1-13/128"	2.205"	Greasable

[Go Back](#)

[Next](#)

# OCDRIVESHAFT.COM

## Driveshaft Build Form: 1310 Series, 3" Aluminum, Transmission Slip Yoke to Pinion Yoke

your name

**The final step to complete this form is Verify the information below:**

Email: your@name.com

Phone number: 555 555-1234

Stockout length (inches): 12.25

Overall Length (inches): 52.375

Slip yoke type: Foreign applications (Add \$40)

Slip yoke application: 24 1.005 6.047 1.375 Subaru, Nissan

Inside Lockup U-joint series: 1.102" cap, 2.205" between flats (Nissan)

The data collected for a custom: 1310 series, 3" ALUMINUM driveshaft with transmission slip yoke and a fixed yoke axle pinion.



(generic image represents style of driveshaft specified by this form)

**The information is correct - Continue and Purchase**

**The information is not correct - Go Back**

[Continue and Purchase](#)

[Go Back](#)

**Verify all entries are correct before submitting form.**

**Entries may be changed by going back.**

**"Continue and Purchase"** sends an email with your driveshaft specs and directs you to the checkout to complete the purchase of your custom driveshaft.

## Driveshaft Build Form: 1310 Series, 3" Aluminum, Transmission Slip Yoke to Pinion Yoke

your name

Thank you for choosing OC Driveshaft.

A copy of your Custom Build Form has been sent to our technicians and to your email for reference.

To complete your order, Click the link below to purchase your custom driveshaft.

**Purchase Custom Shaft**

**"Purchase Custom Shaft"** directs you to the Online Store to finalize your purchase.



[Register](#) | [Login](#)

[HOME](#)

[DRIVESHAFTS](#)

[SHAFT FACTS](#)

[ROYAL PURPLE](#)

[STORE](#)

[CONTACT US AND INFO](#)

3" Aluminum Driveshaft, 1310 Series, Foreign Slip Yoke to U-joint



3" Aluminum Driveshaft, 1310 Series, Foreign Slip Yoke to U-joint

- Custom 3" Aluminum 1310 Driveshaft
- Built to specs from Custom Build Form
- Includes selected foreign Slip Yoke

Price: USD \$460.00

Quantity: \*

1

[Add to cart](#)

**"Add to cart" and complete secure checkout.**

[Aluminum Driveshafts](#)

Aluminum driveshafts are built with Alcoa drawn seamless tubes.

6061-T6 forged aluminum weld yokes.

Available in 3.00", 3.50", 4.00" and 5.00" x .120" wall tubing sizes.

These shafts are built with choice of 1310, 1330, 1350, 1410 or 1480 series, Spicer Life Series U-Joints for high strength and long life.

All Aluminum Driveshafts are precision high speed balanced on our Hines DL-500 driveline balancer.