

SAMPLE FORM

ENTER SPECS FOR CUSTOM SHAFT
DOUBLE-CHECK SPECS BEFORE PURCHASE
PURCHASE IS ALLOWED AFTER COMPLETING FORM

5" ALUMINUM, 1410 Series Slip Yoke To U-Joint

Fill out form to build your ALUMINUM driveshaft

Contact information:

First Name Last Name

Email:

Phone:

 -

Area Code Phone Number

Contact information is used for
automated confirmation email.

[Next](#)

5" ALUMINUM, 1410 Series Slip Yoke To U-Joint

Required measurements and information

This form will help you gather the measurements necessary to build a driveshaft for your application.


IMPORTANT NOTES:

Always measure driveshaft length with vehicle suspension at ride height.

We measure everything in inches.

When measuring anything under 6 inches, use a 6-inch scale or calipers, avoid using a tape measure.

Measurement Guide:

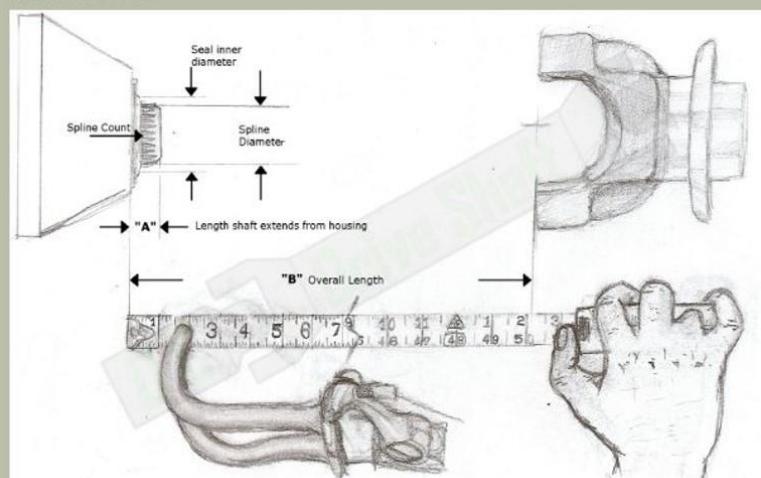

NOTE: Maximum Overall Length for 5" shaft is 78.0". WHY? Click [HERE](#) to find out.

Enter dimensions in fields:

Dimensions are measured in inches and can be entered as decimals (eg. 0.75 or 20.125)

A: Length shaft extends from housing

Valid range (0.000" to 10.000")

B: Overall Length

Valid range for 5" shafts (8.000" to 78.000")

Shaft dimensions are
entered in these fields.


[Go Back](#)

[Next](#)

5" ALUMINUM, 1410 Series Slip Yoke To U-Joint

Select Slip Yoke

Make selection from list below

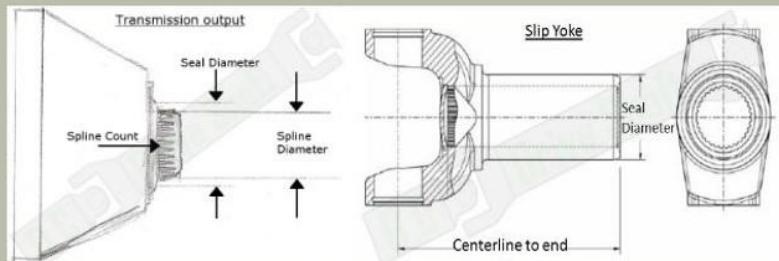

Note: GM TH400 with threaded hole in output shaft is 'Fixed Yoke' transmission and requires a .550" counterbored slip yoke, only available in Sonnax 1350 Chromoly Slip Yoke.

[Slip Yoke choices are displayed Below:](#)



Spline count Spline Diameter Centerline to end Seal Diameter Possible applications



XX

X.XXX

X.XXX

X.XXX

Grampa's roadmaster

Slip Yokes

31	1.390	8.110	1.8850	BMW 1356/1345R
34	1.551	8.110	2.0860	Sportsmobile Nickel Plated
31	1.610	8.340	2.2005	Hummer H2/H3 Counterbore
31	1.610	8.340	2.2005	NP 261R
34	1.740	9.394	2.3000	DODGE
32	1.378	6.940	1.8850	TH400
32	1.378	8.070	1.8850	NP 208/231/241 Nickel Plated
32	1.378	8.750	1.8850	NP 208/231/241R
32	1.378	7.750	1.8850	NP 208/231/241R
30	1.281	8.344	1.6810	Chrysler 727 (ADD \$50)
30	1.326	8.340	1.6800	Chrysler 727 (ADD \$50)

**Choose correct
slip yoke for
your application**

[Go Back](#)


[Next](#)

5" ALUMINUM, 1410 Series Slip Yoke To U-Joint

1410 Series shafts all come with the legendary Spicer Solid Body 1410 U-joint at the axle pinion.

Need to upgrade your differential pinion yoke to a 1350? Check out our list of available 1350 pinion yokes.

Outside lockup style yoke

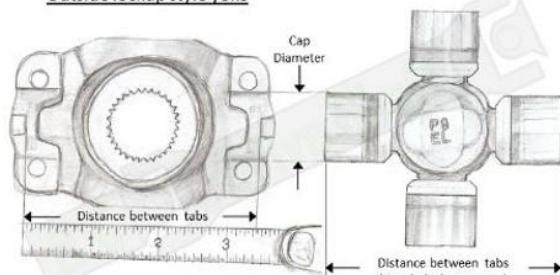

**1410 shafts all get
Spicer Solid Body
1410 U-Joint**

Series	Cap Diameter Decimal	Cap Diameter Fractional	Dimension Between Tabs	Notes
1410	1.188"	1-3/16"	4.187"	Spicer Solid Body

[Go Back](#)

[Next](#)

OCDRIVESHAFT.COM

5" ALUMINUM, 1410 Series Slip Yoke To U-Joint

your name

[The final step to complete this form is Verify the information below.](#)

Email: your@name.com

Phone number: 555 555-1234

Stickout length (inches): .760

Overall Length (inches): 76.25

Slip yoke application: 31 1.610 8.340 2.2005 NP 261R

The data collected for a custom: 1410 series, 5" ALUMINUM driveshaft (transmission slip yoke to U-joint)



(generic image represents style of driveshaft specified by this form)

[The information is correct - Continue and Purchase](#)

[The information is not correct - Go Back](#)

[Continue and Purchase](#)

[Go Back](#)

Verify all entries are correct before submitting form.
Entries may be changed by going back.

“Continue and Purchase” sends an email with your driveshaft specs and directs you to the checkout to complete the purchase of your custom driveshaft.

5" ALUMINUM, 1410 Series Slip Yoke To U-Joint

your name

Thank you for choosing OC Driveshaft.

A copy of your Custom Build Form has been sent to our technicians and to your email for reference.

To complete your order, Click the link below to purchase your custom driveshaft.

[Purchase Custom Shaft](#)

“Purchase Custom Shaft” directs you to the Online Store to finalize your purchase.



[Register](#) | [Login](#)

[HOME](#)

[DRIVESHAFTS](#)

[SHAFT FACTS](#)


[ROYAL PURPLE](#)

[STORE](#)

[CONTACT US AND INFO](#)



5" Aluminum Driveshaft, 1410 Series, Slip Yoke to U-joint



5" Aluminum Driveshaft, 1410 Series, Slip Yoke to U-joint

- Custom 5" Aluminum 1410 Driveshaft
- Built to specs from Custom Build Form
- Includes selected Slip Yoke

Price: USD \$675.00

Quantity: *

1

[Add to cart](#)

Aluminum Driveshafts

“Add to cart” and complete secure checkout.

Aluminum driveshafts are built with Alcoa drawn seamless tubes.

6061-T6 forged aluminum weld yokes.

Available in 3.00", 3.50", 4.00" and 5.00" x .120" wall tubing sizes.

These shafts are built with choice of 1310, 1330, 1350, 1410 or 1480 series, Spicer Life Series U-Joints for high strength and long life.

All Aluminum Driveshafts are precision high speed balanced on our Hines DL-500 driveline balancer.